


# Tylose<sup>®</sup> MH 6002 P4

Technical Data Sheet

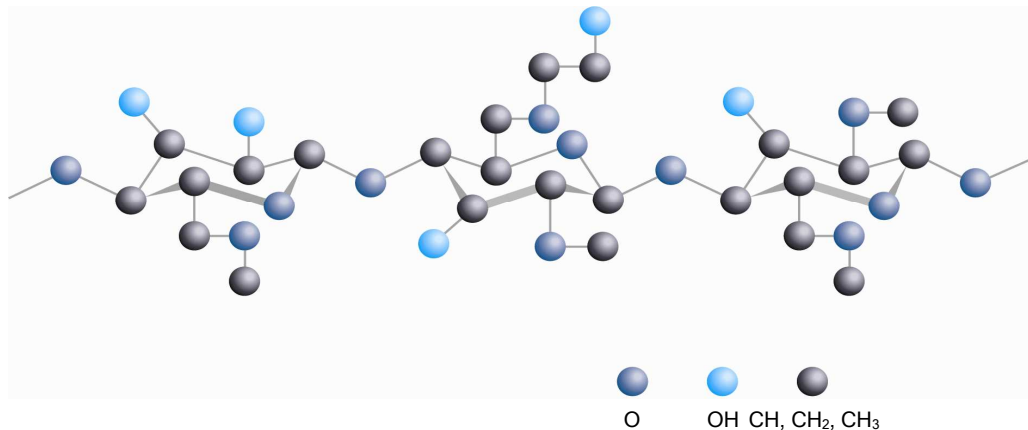

| Product properties |                                       |   |            |
|--------------------|---------------------------------------|---|------------|
| Constitution:      | Methylhydroxyethyl cellulose modified |   |            |
| Appearance:        | powder                                | Delayed solubility:                         | no         |
| Etherification:    | standard etherification               | Thickening effect:                          | moderate   |
| Particle size:     | fine powder                           | Level of viscosity:<br>according to Höppler | 6000 mPa·s |


| Product specification                    |                   |
|--|-------------------|
| Moisture:                                | ≤ 6 %             |
| Content of NaCl:                         | ≤ 1.5 %           |
| Particle size:                           | <125µm: min. 90%  |
| Particle size:                           | <100µm: min. 70%  |
| Viscosity:                               | 5500 - 8000 mPa·s |
| Brookfield RV, 20rpm, 1.9%, 20°C, 20° GH |                   |

| Recommended fields of application       |
|---|
| Manually applied plasters, gypsum based |
| Decorative renders, mineral based       |
| Manually applied plasters, cement based |
| Gypsum based jointing compounds         |
| Exterior insulating finishing systems   |
| Plasters, gypsum based                  |

This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should not therefore be construed as guaranteeing specific properties of the products described or their suitability for a particular application. Any existing industrial property rights must be observed. The quality of our products is guaranteed under our General Conditions of Sale.

# Tylose<sup>®</sup> MH 6002 P4

## Technical Data Sheet

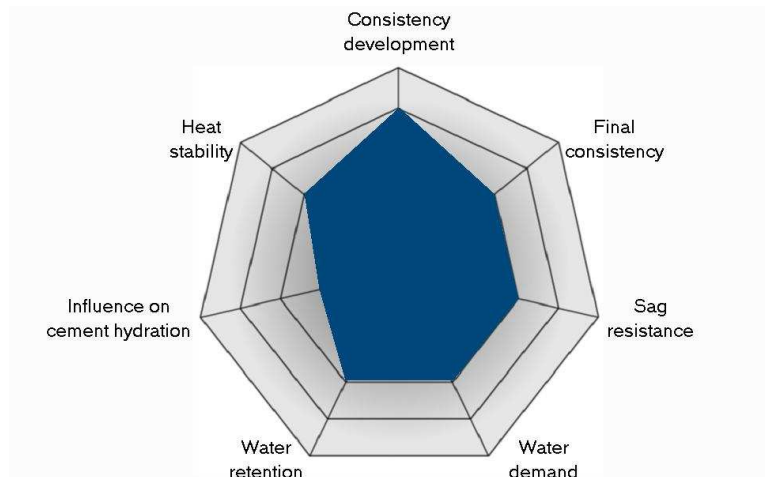

### Application performance

|                          |          |                                |          |
|--------------------------|----------|--------------------------------|----------|
| Consistency development: | fast     | Water retention:               | moderate |
| Final consistency:       | moderate | Influence on cement hydration: | low      |
| Sag resistance:          | moderate | Heat stability:                | standard |
| Water demand:            | moderate |                                |          |

### Packaging, Storage, Safety instructions

Like all fine-particle organic substances, cellulose ethers constitute a dust explosion hazard. Dust formation and deposits must be kept to a minimum so that no ignitable dust/air mixtures can form. Ignition sources such as naked flames, hot surfaces, sparks and static electricity should be avoided. Tylose starts to decompose at about 200°C. Its ignition temperature is >360°C. Tylose burns easily and the fire may spread.

When stored in closed containers, or in its original packaging in a dry place at room temperature, Tylose can be kept for a long time. In the case of high viscosity grades, a slow loss of viscosity can be measured after lengthy storage (>1 year). Tylose absorbs water from moist air. Once opened, container must be resealed and kept tightly closed.

This Tylose-type is supplied in multi-ply paper bags with polyethylene intermediate layer and/or in big bags.

This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should not therefore be construed as guaranteeing specific properties of the products described or their suitability for a particular application. Any existing industrial property rights must be observed. The quality of our products is guaranteed under our General Conditions of Sale.